
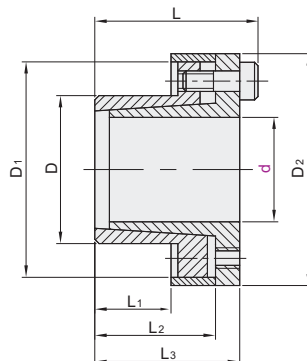


免键胀套

标准型 · 带定心功能

代码	类型	材质	表面处理
ZEUX01	标准型	带定心功能	S45C
ZEUX02			无电解镀镍

※拆卸用螺孔



推荐安装尺寸：

轴：h8

毂：H8

① 类似JB/T7934 Z11型免键胀套



视角标准：第一视角

※拆卸用螺孔的螺径与锁紧螺栓相同。

型号	代码	d	D	L ₁	L ₂	L ₃	L	D ₁	D ₂	传递的轴向力	传递扭矩	接触面压强		DIN912-12.9级锁紧螺钉		
										Ft(KN)	Ft(Nm)	轴	毂	数量	规格	锁紧扭矩
ZEUX01	8	15	12	21	22	25	24	27			39	299	159	3	M4×10	
	9	16					25	28			44	227	128			
	10									10	49	205				
	11	18	14	23	26	30	28	32			53	186	114		M4×12	5.2
	12										58	171				
	14	23					33	38			68	146	89			
	15	24	16	29	36	42	40	45	16		120	196	123	4		
	16										128	184				
	18	26					42	47			191	194	134			
	19	27	18	31	38	44	43	49			202	183	129			
ZEUX02	20	28					44	50	21		213	174	124			
	22	32					48	54			234	114	78			
	24	34					50	56			255	105				
	25		25	38	45	51	55	61	27		266	100	74	6	M6×18	17
	28	39					57	62	32		373	112	81			
	30	41					59	65			480	126	92			
	32	43					62	69	43		511	98	73			
	35	47					66	72			747	120	89			
	38	50	32	45	52	58	69	75	48		811	110	84			
	40	53					71	78			959		83	8		
	42	55					80	86	79		1007	105	80			
	45	59					81	87			1781	130	99			
	48	62	45	62	70	78	84	92			1900	122	94			
	50	65					92	98	99		2473	117	90		M8×22	42
	55	71					98	104			2721	106	82			
	60	77	55	72	80	88	105	111			2968	97	76	9		
	65	84									3215	90	69			



请按图示订货

型号		D
代码	d	
ZEUX01	8	15
ZEUX02	9	16
ZEUX02	10	16

ZEUX01—d8



未税价(元)

● 优惠价

数量	1~4	5~
价格	100%	另行报价




交货期

5



Example
使用示例



同步轮

F3