



代码	类型	材质	表面处理
ZEUX41	薄壁型	S45C	—
ZEUX42			无电镀锌镍

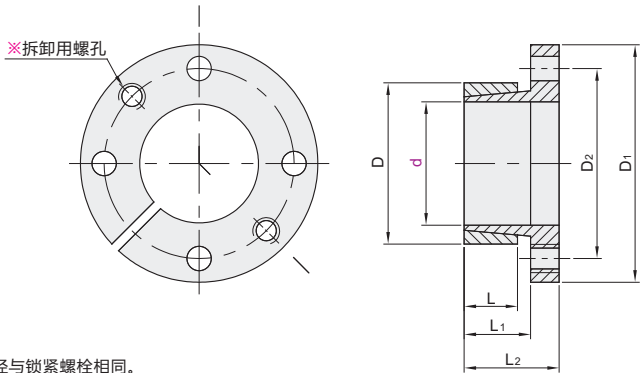

- 推荐安装尺寸：
轴：h8
毂：H8
- 符合JB/T7934 Z14型免键胀套



※ 拆卸用螺孔的螺径与锁紧螺栓相同。
❶ 此型号不含螺栓，如需要请特别提出。

型号		D	D ₁	D ₂	L	L ₁	L ₂	传递的 轴向力	传递 扭矩	接触面压强		DIN912-12.9级锁紧螺钉		
代码	d							Ft(KN)	Ft(Nm)	轴	毂	数量	规格	锁紧扭矩 Ts(Nm)
										N/mm ²	N/mm ²			
ZEUX41 ZEUX42	14	25	42	33				9	64	109	61		M4	2.9
	16								73	96				
	18								82	85				
	19								87	81				
	20	30	50	39	16	20	26	15	152	127	82			
	22								167	116				
	24								182	106				
	25								190	102				
	28	36	55	45					213	91	69		M5	6
	30								228	85				
	32								243	80				
	35	42	62	51	16	20	28	5	266	73	59	4		
	36								274	71				
	38								44	66	54			
	40	48	70	58	421	88	73							
	42				442	84								
	45				55	82	67	890	118	94				
	48	949	110											
	50	62	89	74				20	25	35	40	989	106	83
	55				1088	96								
60	72				99	84								
65		1286	82											




请按图示订货

型号		D
代码	d	
ZEUX41	14	25
ZEUX42	16	
	18	

ZEUX41—d14



Example
使用示例



未税价(元)

● 优惠价

数量	1~4	5~
价格	100%	另行报价



交货期

5